



# SOLUTIONS

for Mining and Mineral  
Processing







KLINGER is the world's leading manufacturer and provider of sealing and fluid control solutions.

Founded in 1886 as a family enterprise, the pioneer in gasket technology today has evolved into a globally operating corporate group comprising global manufacturing, sales and service companies that offer unique know-how and expert on-site consulting services in 60 countries around the world.

Our customers include leading companies from a wide range of industries from manufacturing, infrastructure and automotive to marine, oil & gas, chemicals, pulp & paper, as well as energy, food & beverage, and pharmaceuticals. KLINGER employs around 2,800 people worldwide with total annual sales of around 684 million euros.

€ **684 MIO. ANNUAL SALES**  
684 million euros in revenue generated by the KLINGER Group per year.

 **2,800 EMPLOYEES**  
Our global workforce is 2,800 people strong.

 **80 MARKETS**  
KLINGER Group has already exported to 80 countries and counting.

 **18 PRODUCTION SITES**  
The KLINGER Group manufactures gaskets, valves, instrumentation, expansion joints and hoses in almost 20 countries.

 **60 COUNTRIES**  
The KLINGER Group subsidiaries and representatives are at home all over the world.





# PLANT VIEW

## Mining process stages / Ore Extraction

Mine design is a crucial aspect of the mining process, encompassing the planning and development of a mine to extract and process mineral deposits efficiently and safely. It involves a comprehensive approach that considers various factors, including geological data, mining methods, economic feasibility, and environmental sustainability.

Ore extraction describes the process of removing mineral-bearing rock (ore) from the ground.

### SHAFT/UNDERGROUND MINING


A method of extracting minerals from an ore deposit that is located deep underground. This method involves digging into the earth to create a network of shafts and tunnels that allows miners to access the ore. Underground mining is typically used for deep deposits of minerals that are not economically feasible to extract using surface mining methods.

### SURFACE/OPEN-PIT/ OPEN-CAST MINING

A method of extracting minerals from an ore deposit that is located near the surface of the earth. This method involves removing the overburden, which is the layer of rock and soil that lies above the ore deposit. Once the overburden is removed, the ore can be excavated using large machinery, such as excavators and trucks. Surface mining is typically used for shallow deposits of minerals that are not economically feasible to extract using underground mining methods.

### IN-SITU RECOVERY/ SOLUTION MINING

A method of extracting minerals by dissolving them in a solution. This method is typically used for minerals that are soluble in water, such as copper and uranium. In-situ recovery involves drilling wells into the ore deposit and injecting a solution that dissolves the minerals. The solution is then pumped to the surface, where the minerals are recovered from the solution. In-situ mining is a relatively environmentally friendly method of extracting minerals, as it does not require the removal of large amounts of overburden or waste rock.

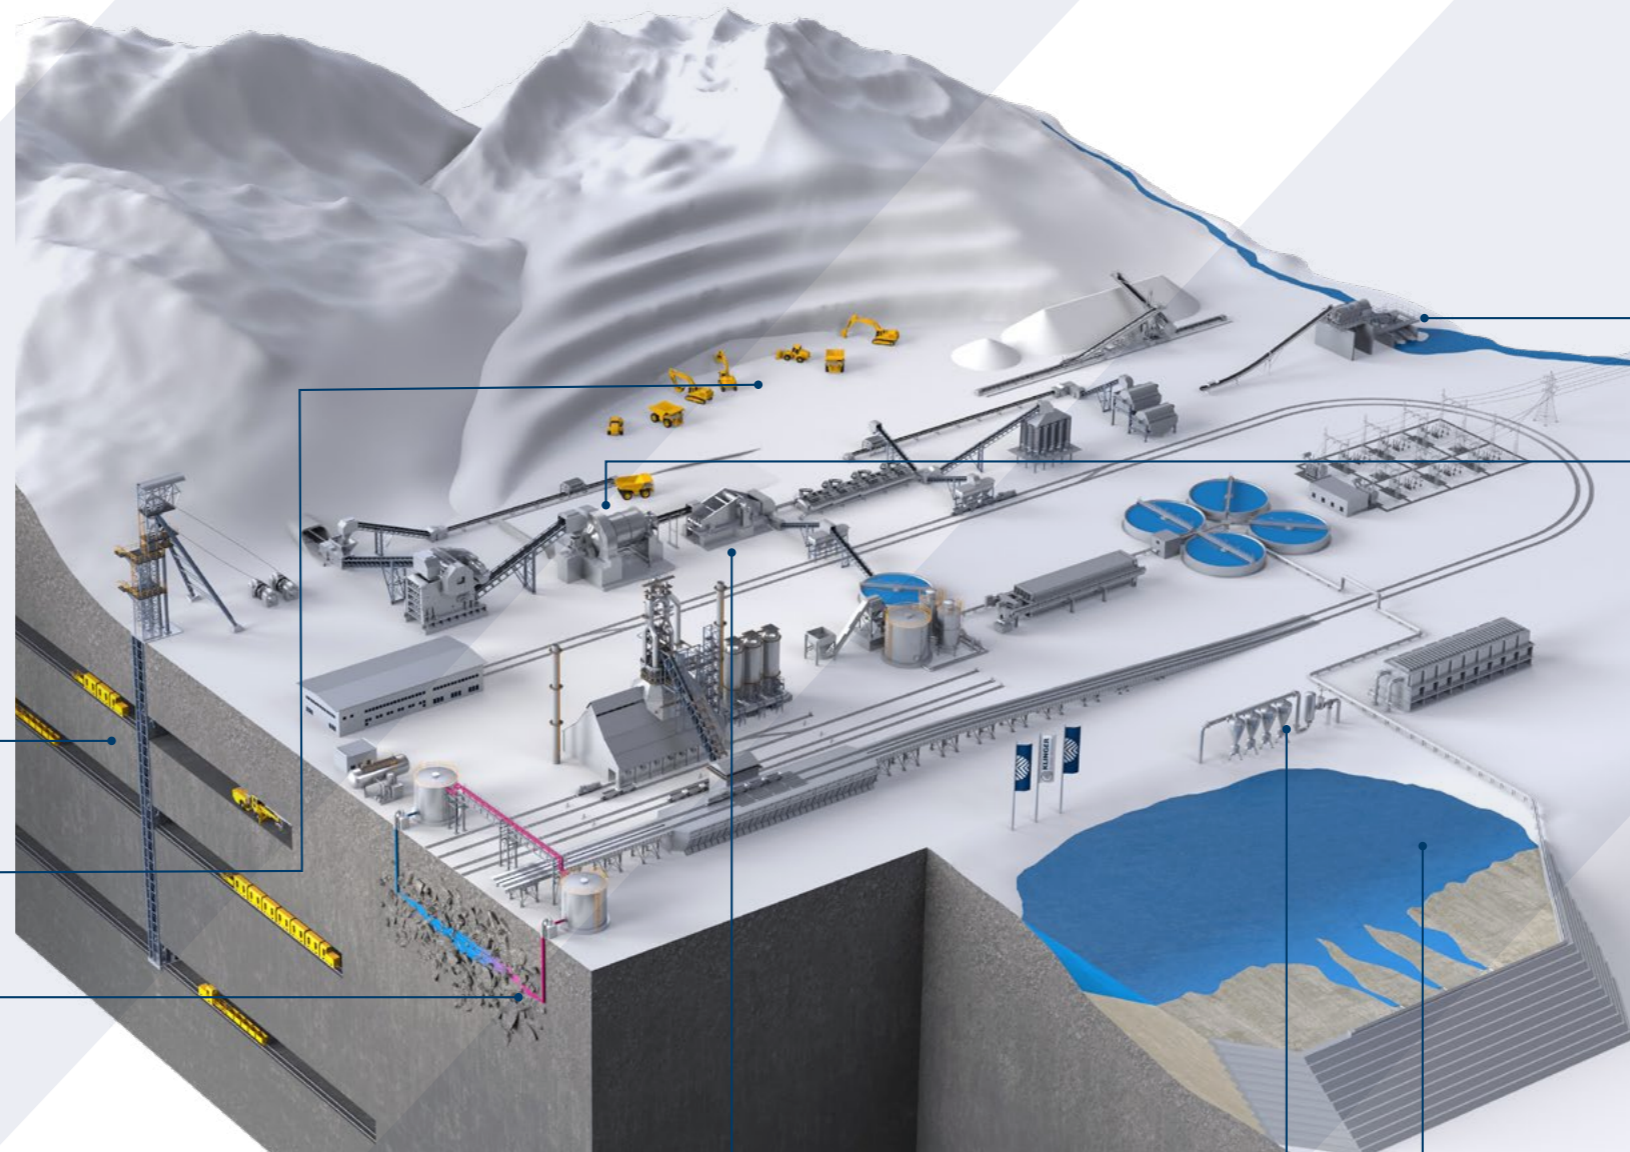

### ALLUVIAL/PLACER MINING

A method of extracting minerals from loose sediments, such as sand and gravel, that have been deposited by rivers and streams. This method involves using water to wash away the lighter sediments and concentrate the heavier minerals, such as gold. Alluvial mining is a relatively simple and inexpensive method of extracting minerals, but it is only effective for recovering minerals that are dense and have a high specific gravity.

### COMMINATION

Crushing and grinding the mined ore into fine particles to liberate the valuable minerals. The reduced particle size assists in removing the minerals or materials from the ore, allowing easier separation from waste materials.

### CRUSHING

Crushing is the process of breaking down the raw ore into smaller pieces to increase its surface area, which facilitates the separation of valuable minerals from the waste rock. Crushing equipment ranges from jaw crushers to impact crushers, depending on the size and hardness of the ore.

### GRINDING

Grinding is the process of further pulverizing the crushed ore into a fine powder. Finer particles have a larger surface area, making it easier to separate the valuable minerals from the waste rock using various concentration techniques. Grinding equipment includes ball mills and rod mills.

### SCREENING

Screening is the process of separating ore particles of different sizes. It involves passing the crushed ore through a series of screens with progressively smaller openings. This allows the valuable minerals to be separated from the waste rock based on their sizes.

### DEWATERING MANAGEMENT

The operation and maintenance of systems that remove groundwater or surface water.

### WASHING

Washing is the process of removing fine particles, known as slimes, from the crushed ore. This is often necessary to prevent slimes from interfering with subsequent processing steps. Washing is typically done using water jets or hydrocyclones.





# PLANT VIEW

## Mining process stages / Concentration

Mineral processing increases the concentration of mineral- or metal-bearing ore by separating it from waste materials, thereby reducing the cost and increasing the speed of recovery and purification. The desired metals are extracted from the concentrates.

Concentration is a crucial stage in the mining process where valuable minerals are separated from waste rock (gangue) to form a concentrated product with significantly higher mineral content. This enhances the efficiency and economic viability of further processing steps like refining and purification.

### LEACHING

This technique uses a chemical solution to dissolve the valuable minerals from the ore. The ore is placed in a tank with the chemical solution, and the valuable minerals are dissolved into the solution. The solution is then separated from the ore, and the valuable minerals are recovered from the solution.

### MAGNETIC SEPARATION

This technique uses the magnetic properties of the valuable minerals to separate them from the gangue.

### GRAVITY SEPARATION


This method uses the difference in density between the valuable minerals and the gangue to separate them.

### FROTH FLOTATION SEPARATION

This method uses the difference in the surface properties of the valuable minerals and the gangue to separate them.

### SMELTING

Smelting is a high-temperature process that involves melting and fusing a mineral to extract the desired metal. It typically involves heating the mineral in a furnace or reactor at high temperatures. The molten metal is then separated from the slag, which is the non-metallic waste material.

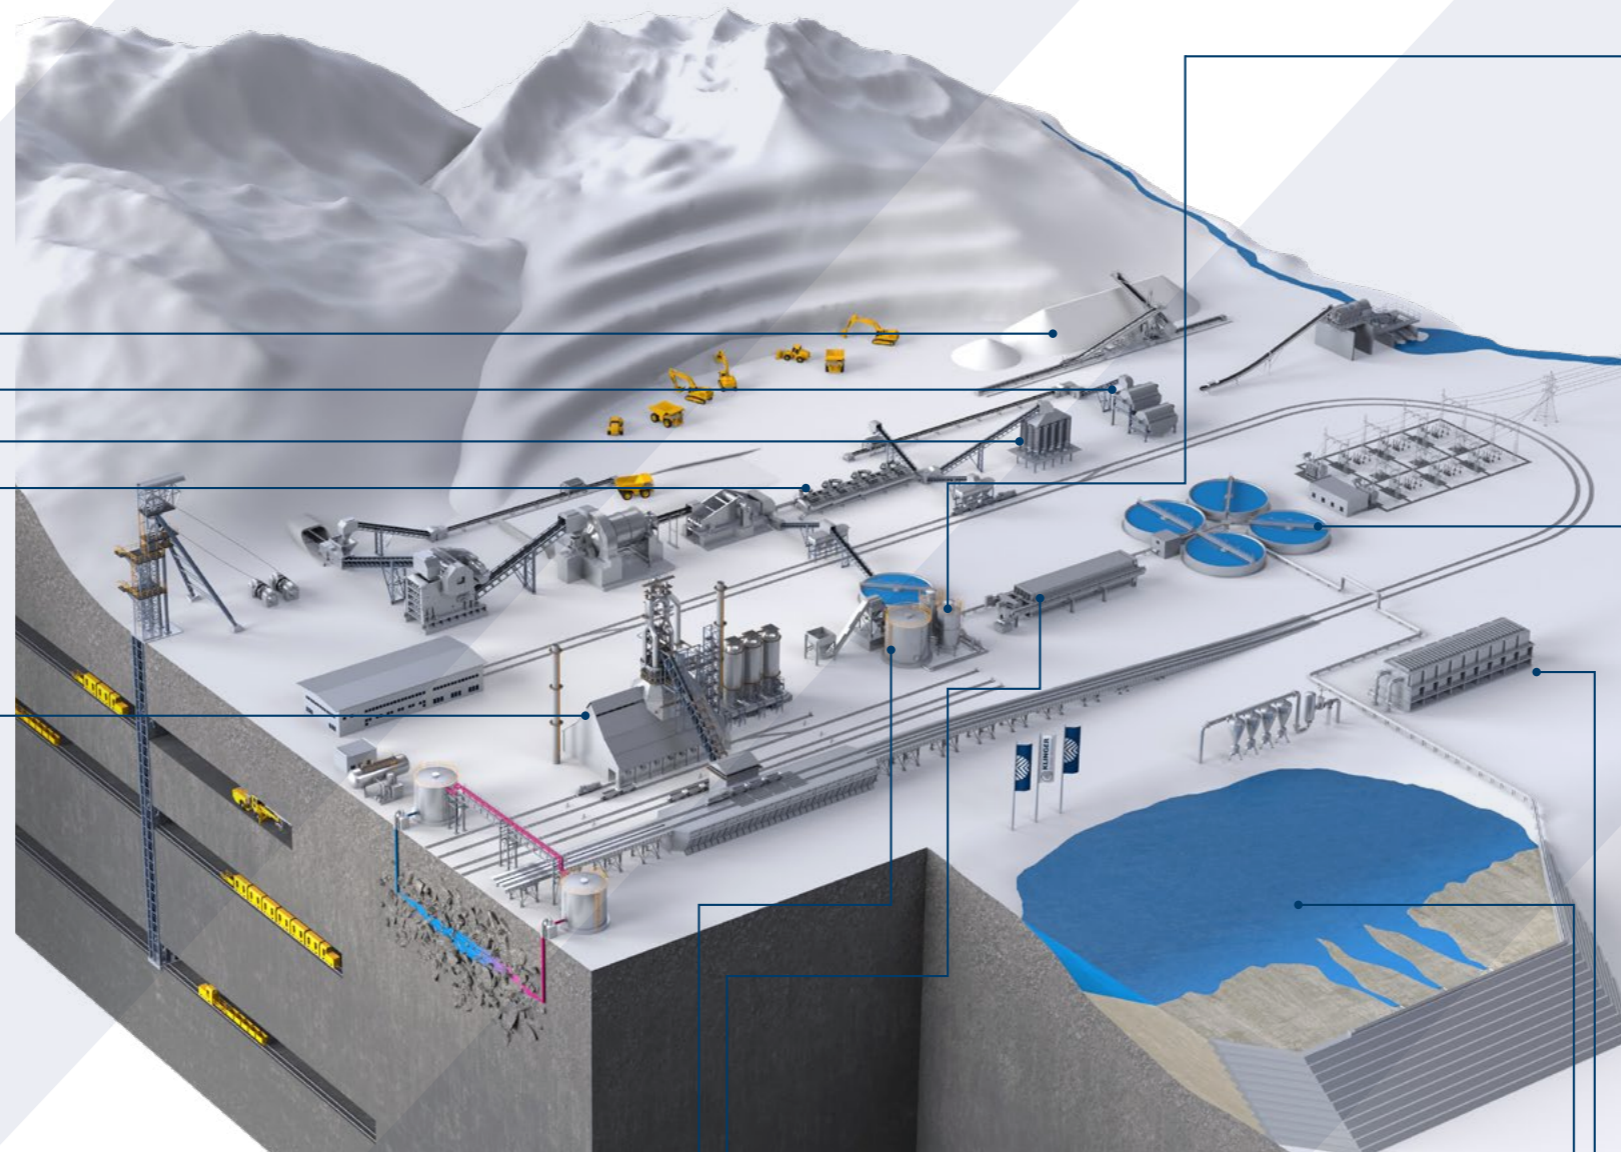

### DIGESTION

Digestion is a leaching process that involves dissolving a mineral in a chemical solution to extract the desired metal. It typically involves mixing the mineral with a solvent and heating the mixture to a specific temperature. The dissolved metal is then separated from the solution using methods such as precipitation or solvent extraction.

### FILTRATION

A process in mining that further dewateres the thickened slurry from the thickening stage to produce a cake or filter cake. The thickened slurry is fed into a filter press or vacuum filter, where the solids are retained on the filter medium while the water passes through. The filter cake is then discharged from the filter and the remaining water is recycled back into the process.

### TAILINGS MANAGEMENT

The removal, storage or disposal of leftover/waste materials from the processing of mined ore.

### ELECTROLYTIC REFINING

Electrolytic refining is a process of purifying metals using electrolysis. The impure metal is used as an anode and is connected to the positive terminal of a DC current. This metal is then dissolved in a solution and deposited on the cathode, thereby purifying the metal.

### REFINING AND PURIFICATION

Refining and purification are the final stages of the mining process where valuable minerals, commonly referred to as concentrates, are further processed to remove any remaining impurities. This involves various methods depending on the specific mineral and desired grade.

### LIQUATION

The liquation method is used for metals with a low melting point. The feedstock is heated to a point slightly above the metal's melting point. This metal then flows out of the feedstock, leaving the impurities behind.

### DISTILLATION

The distillation method is used for metals with low boiling points, such as mercury and zinc. The impure metal is boiled, leaving the impurities behind. These metal fumes are then condensed, resulting in a metal of very high purity.

### VAPOR PHASE

The vapor phase method is used when the impure metal can be converted into a volatile compound (gas) in the presence of a reagent. This volatile compound is broken down to yield high-purity metals.

### ZONE REFINING

Zone refining is used to produce high-purity metals. It is based on the principle that when an impure metal in a molten state is allowed to cool, only the metal crystallizes while the impurities remain liquid.

### CHROMATOGRAPHIC REFINING

Chromatographic refining is the separation of a mixture of chemicals into its individual components. This mixture is dissolved in either a liquid or gas solvent before processing.

### THICKENING

A process in mining that utilizes sedimentation to separate solids from liquids. A slurry of ore and water is fed into a thickener, where the solids settle to form a thickened slurry at the bottom of the tank. The clear liquid, or overflow, is then separated from the thickened slurry and recycled back into the process.



# VALVES

## KLINGER BALLOSTAR BALL VALVE KHI-F

### WITH THE UNIQUE KLINGER ELASTIC SEALING SYSTEM

The KLINGER Ballostar KHI-F ball valves are designed for the harshest and most demanding applications in various industries. Furthermore, the KHI-F comes with stainless steel and duplex housing materials with soft and metal-seated sealing system.


One of the unique features of the Ballostar KHI product range is its sealing system, which ensures exceptional performance. The ball valve housing also comes optionally with a test and drain valve.

This is a significant advantage as it allows for leak testing at any time. These ball valves are suitable for a wide range of applications, including pulp and paper plants, district heating systems, geothermal plants, steelworks, hydro-electric power stations and tunnel boring machines.



### SURFACE OF THE BALL

The picture below shows the almost intact ball surface of the KHI ball valve which has been in service for three years in the mining industry for the media bentonite (emulsion of sandstones in water).

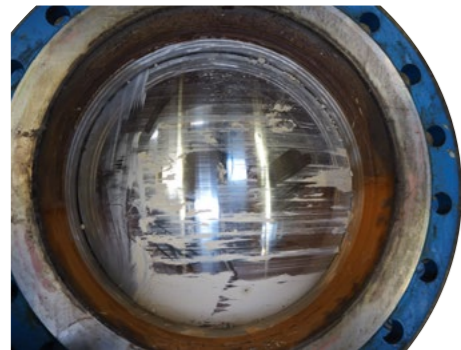

### GREATEST GUARANTEED FIRE SAFETY

The ball valve can be used for fire-safe applications and is certified in accordance with API Standard 607 and EN ISO 10497.

### DOUBLE BLOCK & BLEED

With the DBB function you only need one KLINGER Ballostar KHI ball valve instead of two separate valves. This alternative solution not only saves time and money, but is especially useful for installations with limited space.

### ISO 15848-1

The KLINGER Ballostar KHI-F is significantly below prescribed emission limits for keeping air clean. Certified emission testing pursuant to ISO 15848-1 (fugitive emissions), ISO FE CH-C03-SSA0-tRT (120°C) for Ballostar KHI-F.

### USE WITH GASEOUS OXYGEN

The BAM Berlin has approved the Ballostar KHI ball valve series for applications with gaseous oxygen at operating pressures of up to 16 bar for carbon steel, up to 30 bar for stainless steel and operating temperatures of up to 60 °C.

### EN12266-1, P10, P11 AND P12

The KHI-F ball valves with KFC sealing elements fulfill the leakage rate A acc. to EN12266-1/ISO 5208 soft seated and leakage rate Class IV-S1 acc. to EN60534-4 metal seated.



### KLINGER BALLOSTAR BALL VALVE KHA

#### BENEFITS / PROPERTIES

One product – many applications  
3-piece body, many connection types (flanged, welded, threaded), full bore, DN15-DN125, unique KLINGER sealing system, serviceable without removal, various materials (cast iron, steel, rust- and acid-proof cast iron, duplex).

#### SPECIFICATIONS

- » Standard antistatic
- » Improved corrosion protection KACP
- » Up to +400 °C (metal seat)
- » Cryogenic version (down to -196 °C)
- » Fire-safe
- » Fugitive emissions – complies with "TA-Luft" and ISO 15848
- » Leakage rate A
- » Bi-directional flow
- » Oxygen service
- » Natural gas service (GKHA) / double block and bleed (DBB) design
- » Vacuum version / regulatory design with V-port ball




### KLINGER BALLOSTAR BALL VALVE KHA DBB

#### BENEFITS / PROPERTIES

This 3-piece ball valve is in this case trunnion mounted. This construction alternative (for nominal widths between 50 and 125 mm) improves durability, enabling the ball valve to guarantee optimal functionality and operational safety even under the most demanding conditions. Next to time and cost savings, the optional double block and bleed function, either with a drain valve or drainage by way of the trunnion, is important in applications featuring limited installation space. Furthermore, the Ballostar KHA DBB compels with its sealing and safety features.

#### SPECIFICATIONS

- » Standard antistatic
- » Improved corrosion protection KACP
- » Leakage rate A
- » Bi-directional flow
- » Oxygen service
- » With full bore and drain valve
- » Useable up to 235 °C
- » Double-seated mounted ball made of stainless steel

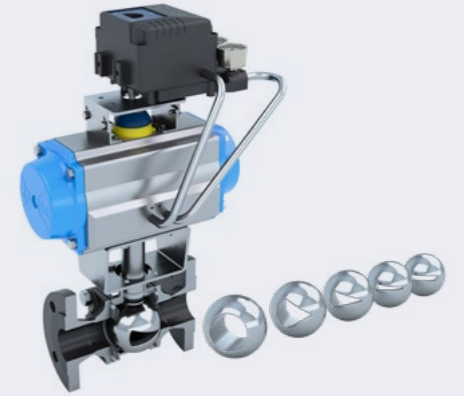

### KLINGER BALLOSTAR BALL VALVE KHA V-port

#### SELECTION

Both pneumatic and electric actuators can be used for the automation of ball valves. The determination of the torque needed by the customer saves investment and follow-up costs. Even though the selection of actuator can be made according to maximum valve torque tolerance, it is highly recommended that the actuator is selected according to actual needs. In this context the necessary pressure differential determines the torque of the required actuator. Ball valves operate from 0 to 90 degrees.

#### CONTROL

As a control valve, the standard ball valve is more like a throttling valve. If there is a possibility to use V-port ball or segment ball design inside the valve, then ball valves turn out to be very good and sharp control valves, whose control characteristics can be tailored exactly to customer needs within the process.



### KLINGER BALLOSTAR BALL VALVE KHE

#### BENEFITS / PROPERTIES

2-piece body, flanged ball valve optimized for the process industry. Due to the 2-piece body design, the risk of external leakage is reduced because there is just one sealing area between body and flanged end piece. Entire ball valve range produced in EN standard (short pattern) and ANSI standard (CL150).

#### SPECIFICATIONS

- » Standard antistatic
- » Fire-safe
- » "TA-Luft"
- » Leakage rate A
- » Oxygen service
- » Natural gas service
- » Gas distribution systems with up to 16 bar




### KLINGER BALLOSTAR PISTON VALVE KVN

#### BENEFITS / PROPERTIES

KLINGER KVN series piston valves with handwheel for flow media such as steam, water and standard gases. Piston valves can be used as control or shutoff valves. The piston valve has a unique graphite seat system which allows its use in contaminated media replacing globe valves, for example. Welded, threaded or flanged valve connection.

#### SPECIFICATIONS

- » Fire-safe
- » Valve for oxygen service
- » Valve on the basis of "TA Luft"
- » Emission testing as per ISO 15848
- » Valve materials: stainless steel, carbon steel and cast iron
- » EN pressure classes PN16-63 and
- » ANSI classes 150 and 300

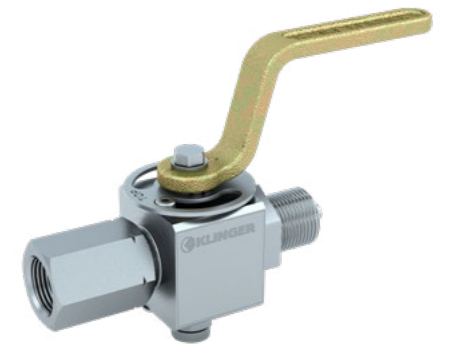

### KLINGER AB COCK MABI

#### BENEFITS / PROPERTIES

AB cocks are robust shutoff cocks with a simple design specifically for measurement technology. Due to their reliability and economic efficiency, they are used by the millions. The MABI series is a pressure gauge stop cock as a cylinder cock, sealed by an elastic packing sleeve that can be retightened. Steel or stainless steel body, handle made of GTS 35, cock plug of stainless steel.

#### SPECIFICATIONS

90-degree operation ensures immediate opening and closing procedure. Hand operation enables throttling, thus use in blow-down pipes possible. Simple design ensures high operating safety and long-term durability. No jamming caused by corrosion.





### KLINGER KNIFE GATE VALVE

## KSD

#### BENEFITS / PROPERTIES

KLINGER offers a wide range of knife gate valves that can be used in various applications with both dry and wet media. The basic uni-directional model is the most economical for waste water, the bi-directional type is advanced for higher pressure, while the through-conduit type is designed for highly concentrated media. Standard materials are stainless steel, ductile iron and alloy. Scrapers are available by request.

#### SPECIFICATIONS

- » Material: GGG40/CF8/CF8M/Alloy
- » Available sizes: DN50-600, larger sizes available by request
- » Flange drilling or Pressur rating: PN10, Class 150, JIS 10K, AS 2129
- » Operation: handwheel, bevel gear, electric/pneumatic/hydraulic actuator; air cylinder epoxy coating with fusion-bonded paint as standard.



### KLINGER GLOBE VALVE

## KAD

#### BENEFITS / PROPERTIES

Ideal for use in high-pressure and high-temperature boiler and steam applications. Available in various body materials to suit your application, including ductile iron, WCB, CF8M and F5. End connection designs include flanged, wafer, socket weld and butt weld.

#### SPECIFICATIONS

- » Pressure rating: From PN10 to PN40 and ASME Class 150 to Class 800
- » Size: DN8 to DN600
- » Tested according to EN 12266 / API 598



### KLINGER CHECK VALVE

## KRD

#### BENEFITS / PROPERTIES

A check valve is a uni-directional sensing valve also known as a non-return or one-way valve and prevents reverse flow of media. Check valves are available as swing, piston, double-door, disc, ball and tilted-disc types. The choice of check valve type is dependent on the application. Body material includes ductile iron, forged steel, stainless steel, and various others.

#### SPECIFICATIONS

- » Available sizes: DN8 to DN600
- » Pressure rating: PN10 – PN32 and Class 150 – Class 800
- » Temperature rating: dependent on valve type



### KLINGER CONCENTRIC BUTTERFLY VALVE

## KKD-81

#### BENEFITS / PROPERTIES

KLINGER KKD-81 series butterfly valves with EPDM liner suitable for process water and inert gases. Butterfly valves are used as control valves or as closing valves in different process applications. Fitted with handle or with manually operated gear.

#### SPECIFICATIONS

- » Material: cast iron body (carbon steel also available)
- » Liner material: EPDM, PTFE, NBR, Viton and Hypalon
- » Pressure rating: PN10-25 and ANSI Class 150
- » Available sizes: DN50-600 and up to DN1200 by request



### KLINGER DOUBLE OFFSET BUTTERFLY VALVE

## KKD-82

#### BENEFITS / PROPERTIES

KKD-82 KLINGER double offset butterfly valves are well suited for applications where rubber-lined butterfly valves cannot be used due to media, pressure and temperature range. They offer 100% bi-directional disc sealing with soft seats, while metal seat offers uni-directional sealing in high-temperature applications. By request, the metal seat option can be made bi-directional to EN 12266-1 Class V. Fire-safe version, and compliance with ISO 15848-1 available by request.

#### SPECIFICATIONS

- » Material: CF8M (carbon steel available)
- » Pressure rating: PN10-40 and ANSI Classes 150 and 300
- » Available sizes: DN50-600 and up to DN1200 by request



### KLINGER TRIPLE OFFSET BUTTERFLY VALVE

## KKD-83

#### BENEFITS / PROPERTIES

KKD-83 KLINGER triple offset butterfly valves with metal seat are designed for high-temperature and high-pressure applications, and are well-suited for applications requiring bi-directional zero leakage. They provide space and weight savings while minimizing installation and maintenance costs. Inherently fire-safe, in compliance with ISO 15848-1 available by request. They are fitted with lever or manual gear, and available in wafer, lug, flanged, and butt-weld end connections.

#### SPECIFICATIONS

- » Material: CF8M (carbon steel available)
- » Pressure rating: PN10-40 and ANSI Classes 150 and 300
- » Available sizes: DN80-600 and up to DN1200 by request



### KLINGER DIAPHRAGM VALVE

## KMD

#### BENEFITS / PROPERTIES

Diaphragm valves consist of three parts. A body with two or more ports, a flexible diaphragm and a seat where the flow may be isolated or throttled.

A saddle (A) seat also called a full port ball or straight-through valve is used for isolation whereas a weir (KB) seat is used for control or throttling. Bodies can be manufactured from cast iron, ductile iron, stainless steel, and other materials by request. Body linings and diaphragms can be manufactured from EPDM, NBR and PTFE-lined elastomer. Other linings and diaphragms are optionally available. These valves are supplied with flanged end connections.

#### SPECIFICATIONS

- » Available sizes: DN15 – DN350
- » Pressure rating: PN6 – PN16 and ANSI Class 125 – Class 150
- » Temperature rating dependent on materials used



### KLINGER PLUG VALVE

## KPD

#### BENEFITS / PROPERTIES

Valve body available in ductile iron, cast iron, CF8M and other materials by request. The plug is available in carbon steel, stainless steel and other materials depending application requirements. The plug may also be fully encapsulated with a PTFE liner. These valves boast a zero-body cavity design.

#### SPECIFICATIONS

- » Available sizes: DN8 – DN250
- » Pressure rating: PN10 – PN50 and ANSI Class 150 – Class 800
- » Temperature rating dependent on valve design



### KLINGER KNIFE GATE FOR SUPPLY

## KSD-SKG

#### BENEFITS / PROPERTIES

KLINGER KSD-SKG knife gate valves are elastomer-lined, jam-proof, bi-directional valves with in-line replaceable stainless knife are well-suited for the most challenging applications, such as slurry, mining, and coal-fired power plants. The double sleeved design provides a bubble-tight shutoff when the gate is closed. Its secondary seal eliminates any leakage not only inside-out but also outside-in, which is dynamically self-adjusting, and maintains long lasting internal lubrication. Removable drain plate is optional for splash control.

#### SPECIFICATIONS

- » Material: GGG40/CF8/CF8M/alloy
- » Available sizes: DN50-600 and larger sizes by request
- » Flange drilling: PN10, ANSI Class 150, JIS 10K, AS 2129
- » Operation: handwheel, bevel gear, electric/pneumatic/hydraulic actuator; air cylinder epoxy coating with fusion-bonded paint as standard



### KLINGER LINED BUTTERFLY VALVE

## KKD-L81

#### BENEFITS / PROPERTIES

KLINGER KKD-L81 series butterfly valves for chemically demanding applications such as chlorine dioxides and acids. Butterfly valves can be used as control or shutoff valve. Fitted with handle or with manual gear. Valves come with PTFE lining and are installed between flanges.

#### SPECIFICATIONS

- » Material: carbon steel (CF8M available) with PTFE, FEP or PFA lining
- » Pressure rating: PN10-25 and ANSI Class 150 (ANSI Class 300 flange drilling also available)
- » Available sizes: DN80-600



### KLINGER SEGMENT BALL VALVE

## KHD-SG

#### BENEFITS / PROPERTIES

KLINGER KHD-SG segment valves are economical high-performance valves for on/off or control purposes, designed for liquid, gas, vapor and slurry control applications. They are lightweight and have a low-torque design. Available with both metal and soft seats, standard with wafer or flanged connections. Bare shaft for mounting of actuator or with manual operation.

#### SPECIFICATIONS

- » Valve material CF8M (Carbon steel also available) and pressure classes in EN standard are PN16 and ANSI Class 150, Class 600. Standard sizes are DN25-400 (1-16").



### KLINGER BUTTERFLY POLYURETHANE LINER

## KKD-PU

#### BENEFITS / PROPERTIES

KKD-PU polyurethane-lined butterfly valves are particularly suitable for mining, as the PU liner is highly resistant to abrasive wear, which in combination with stainless steel disc and tungsten carbide coating can be utilized in many applications involving harsh media. Valves are rated for 10 or 16 bar and suitable for below 100 °C temperature.

#### SPECIFICATIONS

- » Special valve for mining service
- » Material: GGG40 as standard, others optional
- » Liner: polyurethane as standard
- » Pressure rating: PN10-16
- » Available sizes: DN50-300 and up to DN600 by request



# GASKETS

## KLINGER TOPCHEM 2003

### KEY FEATURES

- » Mechanically stabilized with glass microspheres
- » Excellent chemical resistance to acids and alkalis
- » Good creep and stress relaxation values
- » High compression values
- » Ideal for cryogenic service
- » Good mechanical strength



### BENEFITS

A fantastic, chemically resistant general-purpose material. Maintains bolt load for extended periods of time when compared to virgin grades. Can withstand moderate assembly stresses. Ideal for use with liquified gases. Forgiving of worn / pitted / damaged / misaligned seal faces.

### SPECIFICATIONS

**Pressure:** Up to 62 bar at 0 °C\*  
**Temperature:** Up to 200 °C at atmospheric pressure\*

\*Maximum pressure and maximum temperature should not be used in conjunction. PTFE based materials should not be used with alkali metals at elevated temperatures.

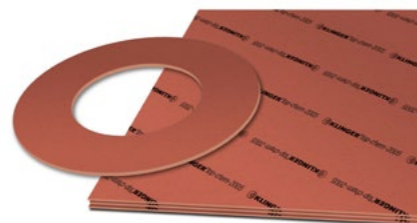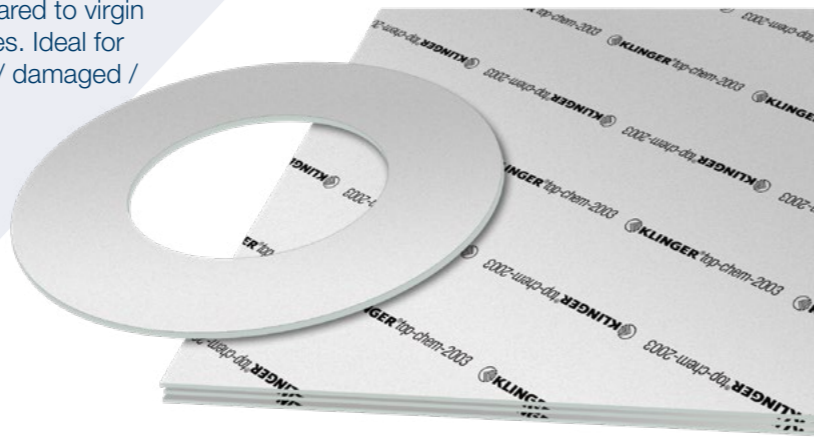

## KLINGER TOPCHEM 2000

### KEY FEATURES

- » Mechanically stabilized with silicon carbide
- » Excellent chemical resistance to acids and alkalis
- » Excellent creep and relaxation values
- » Ideal for cryogenic service
- » Excellent mechanical strength

### BENEFITS

A fantastic, chemically resistant general-purpose sealing material. Maintains bolt load for extended periods of time. Can withstand high assembly stresses. Ideal for use with liquified gases.

### SPECIFICATIONS

**Pressure:** Up to 62 bar\*  
**Temperature:** Up to 250 °C\*

\*Maximum pressures and temperatures should not be used in conjunction. PTFE based materials should not be used with alkali metals at elevated temperatures.

## KLINGER TOPCHEM 2005

### KEY FEATURES

- » Mechanically stabilized with silica
- » Excellent chemical resistance to acids
- » Excellent creep and stress relaxation values
- » Ideal for cryogenic service
- » Good mechanical and dielectric strength

### BENEFITS

A fantastic, alkali-resistant sealing material. Maintains bolt load for extended periods of time. Can withstand high assembly stresses. Ideal for use with liquified gases. Ideal gasket for use in flange insulation kits.

### SPECIFICATIONS

**Pressure:** Up to 62 bar at 0 °C\*  
**Temperature:** Up to 250 °C at 40 bar\*

\*Maximum pressures and temperatures should not be used in conjunction.

## KLINGER TOPCHEM 2006

### KEY FEATURES

- » Mechanically stabilized with barium sulfate
- » Excellent chemical resistance to alkalis
- » Excellent creep and stress relaxation values
- » Ideal for cryogenic service
- » Good mechanical strength

### BENEFITS

A fantastic alkali resistant sealing material. Maintains bolt load for extended periods of time. Can withstand high assembly stresses. Ideal for use with liquified gases.

### SPECIFICATIONS

**Pressure:** Up to 62 bar at 0 °C\*  
**Temperature:** Up to 250 °C at 40 bar\*

\*Maximum pressures and temperatures should not be used in conjunction. PTFE based materials should not be used with alkali metals at elevated temperatures.



## KLINGER MAXIFLEX SPIRAL WOUND

### KEY FEATURES

- » A semi-metallic gasket with excellent creep / stress relaxation and recovery values
- » May be manufactured from various materials to suit your application
- » A heavy duty and high integrity gasket
- » Designed and manufactured as a self-centering gasket


### BENEFITS

Suitable for high pressure and high temperature applications. Due to its excellent recovery, it will maintain a tight seal in aggressive cyclic applications. A very versatile gasket as chemical and temperature resistance is dependent on the materials of construction. Due to its low creep values, it will maintain the applied bolt load for an extended period.

### SPECIFICATIONS

**Standards:** ASME B16.20, EN 1514-2, ISO 7005  
**Pressure:** Up to 400 bar\*  
**Temperature:** Up to 900 °C\*

\*The above pressures and temperature are dependent on the overall design and material selection.

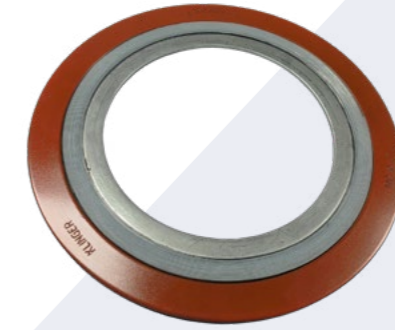

## MONEL SPIRAL WOUND GASKETS

### KEY FEATURES

- » A semi-metallic gasket with excellent creep/stress relaxation and recovery values
- » Manufactured from Monel / carbon steel and your choice of PTFE or graphite fillers
- » A heavy duty and high integrity gasket
- » Designed and manufactured as a self-centering gasket

### BENEFITS

Suitable for high pressure and high temperature applications. Due to its excellent recovery, it will maintain a tight seal in aggressive cyclic applications. Has superior chemical resistance to HF / hydrofluoric acid. Due to its low creep values, it will maintain the applied bolt load for an extended period.

### SPECIFICATIONS

**Standards:** ASME B16.20, EN 1514-2, ISO 7005  
**Pressure:** Up to 400 bar\*  
**Temperature:** PTFE filled: 180 °C \* Graphite filled: 400 °C\*

\*The above pressures and temperatures are dependent on the overall design and material selection.



## KLINGERSIL C-4324

### KEY FEATURES

- » An economy grade material
- » Low seating stress
- » Ideal for lower performance applications


### BENEFITS

Reliable service at reduced cost. Seals at low bolt load and is suitable for most flat face flange applications. Easy to cut on site and is available in large sheet sizes.

### SPECIFICATIONS

**Pressure:** Up to 60 bar\*  
**Temperature:** 150 °C\*

\*Maximum pressures and temperatures should not be used in conjunction with each other.

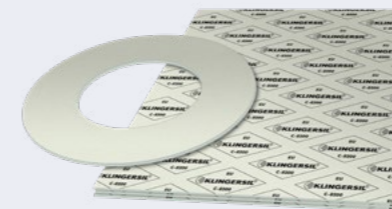

## KLINGERSIL C-8200

### KEY FEATURES

- » An economy acid-resistant grade gasket sheeting
- » Manufactured from a glass fibre with a Hyperlon binder


### BENEFITS

Chemically resistant to most acids excluding Nitric acid. Easy to cut on site and is available in large sheet sizes. Suitable for use with Sulphuric acid at 96 % concentration.

### SPECIFICATIONS

**Pressure:** Up to 60 bar\*  
**Temperature:** 100 °C\*

\*Maximum pressures and temperatures should not be used in conjunction.

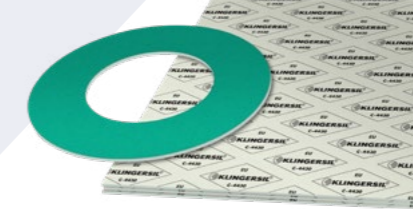

## KLINGERSIL C-4430

### KEY FEATURES

- » Excellent dielectric strength
- » Good stress relaxation values
- » Excellent fluid swell / percentage thickness increase values
- » Good gas permeability/tightness values

### BENEFITS

Ideal gasket for use in flange insulation kits. Maintains bolt load for an extended period. An ideal gasket for use in oils and fuels. A good gasket for sealing vacuums and gases.

### SPECIFICATIONS

**Pressure:** Up to 60 bar\*  
**Temperature:** 250 °C\*

\*Maximum pressures and temperatures should not be used in conjunction. Maximum recommended temperature in steam applications is 180 °C.



## MILAM PSS

### KEY FEATURES

- » Ultra-high heat resistance
- » Manufactured from aluminosilicate / mica phlogopite
- » Good stress relaxation values
- » Good compressibility and recovery

### BENEFITS

Maintains bolt load for extended periods of time. Forgiving of flange seal face damage. Tolerant of cyclic service. Effectively seals gases at elevated temperatures.

### SPECIFICATIONS

**Pressure:** Up to 5 bar at 900 °C\*, up to 17 bar at 600 °C\*  
**Temperature:** 900 °C at 5 bar\*, 600 °C at 17 bar\*

\*Maximum pressures and temperatures based on 2.0mm thick material.





## EPDM

### KEY FEATURES

- » Good chemical resistance
- » Good heat resistance
- » Good resistance to ozone and ultraviolet (UV) radiation
- » Tear resistant

### BENEFITS

A good general-purpose sealing material. Resistant to aging and can be used outdoors where it is subject to weathering. Ideal for use as trims, skirting, and for flat-faced flanges. Easy to cut on site.

### SPECIFICATIONS

**Pressure:** Up to 10 bar\*  
**Temperature:** Up to 120 °C when cured with Sulfur\*  
 Up to 150 °C when cured with Hydrogen Peroxide\*

\*Maximum pressures and temperatures should not be used in conjunction.



## ENVELOPE GASKETS

### KEY FEATURES

- » Excellent resistance to acids and alkalis
- » Excellent creep and stress relaxation values (dependent on filler selection)
- » An inexpensive chemically resistant gasket
- » Excellent mechanical strength

### BENEFITS

A fantastic, chemically resistant general-purpose gasket. Maintains bolt load for extended periods of time. Can withstand high assembly stresses. Can be manufactured in a variety of thicknesses to suit your application.

### SPECIFICATIONS

**Pressure:** Up to 40 bar\*  
**Temperature:** Up to 180 °C\*

\*The above pressures and temperature are dependent on the overall design and material selection.



## RUBBER INSERTION

### KEY FEATURES

- » An inexpensive gasket mostly used in water applications
- » Good compressability
- » Tear resistant

### BENEFITS

A good general-purpose sealing material for water applications. Seals at low bolt load. Ideal for use on flat-faced flanges. Easy to cut on site.

### SPECIFICATIONS

**Pressure:** Up to 10 bar\*  
**Temperature:** Up to 80 °C\*

\*Maximum pressures and temperatures should not be used in conjunction.

KLINGER is the world's leading manufacturer and provider of industrial fluid sealing and fluid control products.



## RUBBER-STEEL GASKET

### KEY FEATURES

- » Good chemical resistance
- » Good heat resistance
- » Excellent pressure resistance
- » Excellent compressive strength due to the steel center ring

### BENEFITS

A good general-purpose high-pressure gasket. Can withstand high applied bolt loads. Seals at low bolt loads. Creates an effective seal on soft seal faces. Ideal for use in high-pressure HDPE piping.

### SPECIFICATIONS

**Pressure:** Up to 40 bar\*  
**Temperature:** Up to 85 °C\*

\*Maximum pressures and temperatures should not be used in conjunction.





# GLAND PACKING

## K7302DL

Manufactured from various high-strength modified aramid yarns result in a packing with high lubrication retention ability resulting in low shaft or sleeve wear. Ideal for use in high-pressure and high-speed pumping applications. KLINGER Style K7302DL is the market-leading slurry packing. Also available with a PTFE lubricant. Exclusive to KLINGER.

### SPECIFICATIONS

- » Temperature: 260 °C\*
- » pH Range: 2 – 12\*
- » Pressure: 36 bar\*
- » Surface speed: 16 m/s\*
- » Services: Rotary, reciprocating and valves

\*Maximum values – temperature, pressure, pH and speed should not be combined in any one application without careful consideration. Common sense balancing of limiting factors is always advised.



## K54H/F

### BENEFITS / PROPERTIES

KLINGER K54H is an excellent PTFE packing for plant-wide use especially when a clean, non-contaminating packing is required with a very high degree of chemical resistance. Can be used in virtually all media including strong acids and alkalis. K54F is suitable for use in valves in oxygen service up to 20 bar pressure.

### SPECIFICATIONS

- » Temperature: 260 °C\*
- » pH range: 0 – 14\*
- » Pressure: 20 bar\*
- » Surface speed: 20 m/s\*
- » Services: Rotary, reciprocating, static and valves

\*Maximum values – temperature, pressure, pH and speed should not be combined in any one application without careful consideration. Common sense balancing of limiting factors is always advised.

## K7301

### BENEFITS / PROPERTIES

KLINGER K7301 is a dry general-purpose seal used to seal doors and covers on boilers, ovens and furnaces, and as rotary kiln seals, brickwork bumper seals and electrode seals in arc furnaces. Available in round, square or rectangular cross-sections, from 3 mm up to 200 mm.

### SPECIFICATIONS

- » Temperature: 700 °C\*
- » pH range: 3 – 9\*
- » Pressure: 5 bar\*
- » Services: Static sealing only

\*Maximum values – temperature, pressure, pH and speed should not be combined in any one application without careful consideration. Common sense balancing of limiting factors is always advised.



## K25

### BENEFITS / PROPERTIES

KLINGER K25 is an aramid fibre packing impregnated with a PTFE dispersion. It is recommended for use in media containing suspended solid abrasive particles. For use in pumps, mixers, valves, and knife gates. Ideal for heavy-duty slurry applications in the pulp & paper, agriculture, and mining industries.

### SPECIFICATIONS

- » Temperature: 260 °C\*
- » pH range: 2 – 12\*
- » Pressure: 30 bar\*
- » Surface speed: 15 m/s\*
- » Services: Rotary, reciprocating, static and valves

\*Maximum values – temperature, pressure, pH and speed should not be combined in any one application without careful consideration. Common sense balancing of limiting factors is always advised.

## K4313

### BENEFITS / PROPERTIES

KLINGER K4313 is a unique cross-braided packing that is made from a combination of PTFE with a graphite inclusion and aramid corners. The strong aramid corner posts resist extrusion from the stuffing box while ensuring that unwanted solids are kept out.

### SPECIFICATIONS

- » Temperature: 260 °C\*
- » pH range: 2 – 12\*
- » Pressure: 40 bar\*
- » Surface speed: 20 m/s\*
- » Services: Rotary, reciprocating and static

\*Maximum values – temperature, pressure, pH and speed should not be combined in any one application without careful consideration. Common sense balancing of limiting factors is always advised.

## K20

### BENEFITS / PROPERTIES

KLINGER Style K20 has the ability to handle a wide range of chemicals as well as light-duty slurry applications. Style K20 is manufactured from glass and acrylic yarns and lubricated with our proprietary Doulon® lubricant, providing excellent heat transfer and lubricating properties for an extended service life and low shaft wear.

### SPECIFICATIONS

- » Temperature: 175 °C\*
- » pH range: 4 – 10\*
- » Pressure: 15 bar\*
- » Surface speed: 12 m/s\*
- » Services: Rotary, reciprocating, static and valves

\*Maximum values – temperature, pressure, pH and speed should not be combined in any one application without careful consideration. Common sense balancing of limiting factors is always advised.

Control of fluid loss is essential to the successful operation of mechanical equipment used in fluid handling.





# PIPE PRODUCTS

## LONG BARREL COUPLING

### BENEFITS

Unifit long barrel couplings are specifically designed for connecting GRP and HDPE pipe. Barrel lengths are specified to cater to HDPE thermal expansion & contraction upon installation.

### SPECIFICATIONS

- » Pressure: Up to PN64
- » Available sizes: DN40 to DN3000
- » Suitable for most common pipe materials



KLINGER's pipe products – connecting innovation.



### DISMANTLING JOINT

#### BENEFITS / PROPERTIES

Dismantling joints are designed to provide greater versatility for the designer at the planning stage and the contractor at the installation and maintenance stage of flanged piping systems. Dismantling joints are predominantly used in pump stations and valve chambers.

#### SPECIFICATIONS

- » Pressure: Up to PN64
- » Available sizes: DN40 to DN3000
- » Available in any flange drilling



### FLANGE ADAPTOR

#### BENEFITS / PROPERTIES

Unifit flange adaptors are used for joining flanged pipeline components to plain-ended pipes and have wide sealing tolerances that can suit various flange drillings.

#### SPECIFICATIONS

- » Pressure: Up to PN64
- » Available sizes: DN40 to DN3000
- » Available in any flange drilling and suitable for most common pipe materials




### ULTRA REPAIR CLAMP

#### BENEFITS / PROPERTIES

The Ultra range comprises clamps, saddles and tees. It represents a comprehensive range of stainless steel products for tapping and repairing pipes permanently and easily. They meet a wide variety of needs. It is important to note that clamps and tapping products in this range are not intended for joining pipes.

#### SPECIFICATIONS

- » Pressure: Up to 16 bar
- » Available sizes: DN15 to DN1200
- » Suitable for most common pipe materials

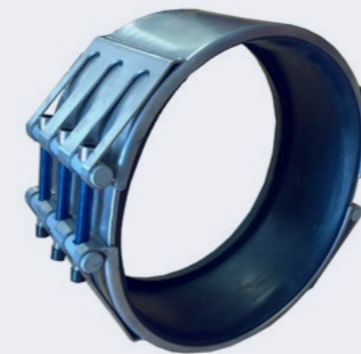

### G-FLEX STAINLESS STEEL REPAIR COUPLING

#### BENEFITS / PROPERTIES

The G-Flex repair coupling is the ideal solution for all situations where permanent repair of a pressure pipe is required. Simply open up the coupling, wrap it around the pipe and tighten the bolts. The pipe is repaired within minutes, thereby avoiding costly downtime. Manufactured from stainless steel, the G-Flex repair coupling exhibits excellent corrosion resistance.

#### SPECIFICATIONS

- » Pressure: Up to 30 bar
- » Available sizes: DN20 to DN3000
- » Suitable for most common pipe materials



### POLYGRIP COUPLING

#### BENEFITS / PROPERTIES

The PolyGrip range was created to offer a straightforward and efficient method for mechanically joining PVC and HDPE pipes, specifically for end restraint capability. The range also includes flange adaptors and harnesses, all designed to provide support and secure pipe connections, preventing both pipe collapse and pipe end pullout.

#### SPECIFICATIONS

- » Pressure: Up to 16 bar
- » Available sizes: DN63 to DN315
- » To suit HDPE and PVC pipes



### BUFFALO SADDLE

#### BENEFITS / PROPERTIES

Buffalo Saddles are designed to offer the installer a universal saddles that will accommodate almost all rigid pipe diameters of a specific pipe outside diameter (OD).

#### SPECIFICATIONS

- » Pressure: Up to 16 bar
- » Available sizes: DN50 to DN600
- » Outlet: DN20 BSP to DN100 BSP, DN50 to DN100 flanged
- » Suitable for most common pipe materials



# EXPANSION JOINTS


## RUBBER BELLOWS

### BENEFITS

Rubber expansion joints are flexible units that are manufactured from natural or synthetic elastomers. Rubber expansion joints are the perfect solution for pipe systems to absorb movements, vibrations or noise, resulting in a significantly prolonged service life of the piping and connected equipment.

A good solution for vibration, noise and misalignment challenges. Flanges are available in electrogalvanized carbon steel, stainless steel or plant-specific materials.

Rubber bellows are available with limit rods to provide a safe, reliable, durable and maintenance free solution. The flexible element may be manufactured from various elastomeric materials to suit the required temperature, chemical and corrosion resistance of the application.

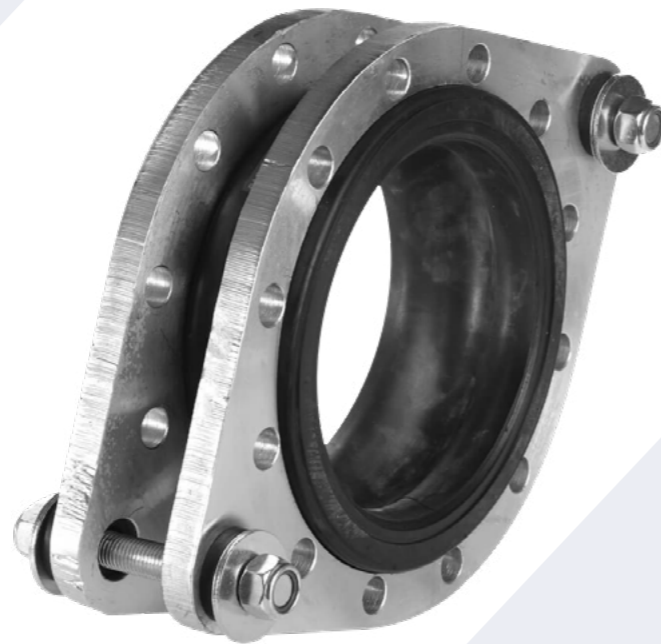

These types of expansion joints find safe application in many industries.

### SPECIFICATIONS

**Pressure:** Up to 16 bar\*  
**Temperature:** Dependent on the materials of construction

\*Maximum pressures and temperatures should not be used in conjunction.



## STAINLESS STEEL BELLOWS

### KEY FEATURES

Metal expansion joints consist of a flexible bellow element with various end connections, such as flanges, butt welds or threaded ends to allow connection to the adjacent piping or equipment.

Metal expansion joints are manufactured from relatively thin-walled tubing to form a flexible bellow element.

### BENEFITS

Metal expansion joints provide a high integrity, high pressure, high temperature and maintenance-free flexible joint within the piping system. This reduces stresses caused by thermal expansion and contraction by absorbing pipework and equipment movement.

As stainless steel bellows are compact, it may be used in areas of the plant where space may be limited.

### SPECIFICATIONS

KLINGER manufactures and supplies a wide variety of expansion joints from DN80 to DN6000, including specially designed and customer-specified systems.

**Pressure:** Up to 150 bar\*  
**Temperature:** Up to 900 °C\*

\*Maximum pressures and temperatures should not be used in conjunction.

Expansion joint designs are in accordance with the latest edition of international design codes such as EJMA (Expansion Joint Manufacturers Association), ASME VIII Appendix 26, ASME B31.3.



## FABRIC EXPANSION JOINTS

### KEY FEATURES

Fabric expansion joints are flexible connectors designed to provide stress relief, reduce vibration and noise as well as sealing in ducting systems carrying gaseous media.

These joints are fabricated from a wide variety of materials, including polymers, synthetic elastomers, fabrics, insulation materials and fluoroplastics, to suit various applications.

### BENEFITS

- » Expansion or contraction of the duct due to thermal cycling
- » Isolation of components to minimize the effects of vibration or noise
- » Movement of components during process operations
- » May be manufactured by combining various layers of engineering fabrics to suit the pressure, temperature and movement of the application.

### SPECIFICATIONS

**Pressure:** Up to 50 KPa\*  
**Temperature:** Up to 900 °C\*

\*Maximum pressures and temperatures should not be used in conjunction.



# INSTRUMENTATION

## ACTUATORS KRP

### BENEFITS / PROPERTIES

Actuators are used for the automation of industrial valves and are found throughout the mining industry. This allows for easy process control of the entire plant even over vast distances. Actuators may be pneumatically, hydraulically, or electrically controlled and are available in a single-acting and double-acting configuration.

Actuators either produce a rotary or linear motion and may be configured with the use of springs to fail open or fail closed. Actuators may be fitted with limit switches and position indicators.



### POSITIONERS

#### BENEFITS / PROPERTIES

A positioner acts as control unit of an pneumatically actuated valve. It receives a control signal and the actuator then moves the valve into the desired position according to that setpoint.

#### SPECIFICATIONS

Normal pressure for positioners (air) is 4,5-8 bar(g). There are special products for ATEX zones and also products for different reliability levels (SIL) according to customer specifications. Customers receive position information, additionally the positioner is able to communicate via several protocols within the automation system.

### LIMIT SWITCHES

#### BENEFITS / PROPERTIES

When valves only move to the open and closed positions without controlling fluids in the middle position, the valve actuator can be equipped with a device that gives a signal to the automation system when the valve is fully open or closed.

#### SPECIFICATIONS

Limit switches are operating with mechanical or inductive sensors. There are special products for ATEX zones and also products for different reliability levels (SIL) according to customer specifications.

### SOLENOID VALVES

#### BENEFITS / PROPERTIES

A positioner moves an actuator to the valve position that corresponds to the setpoint. The valve actuator can be driven with a device that feeds compressed air into actuator to move the valve into open or close position. Special features can be used to move the valve also in the middle positions to gain some control functions.

#### SPECIFICATIONS

Normal pressure for solenoid valves (air) is 4,5-8 bar(g). There are special products for ATEX-zone products for different reliability levels (SIL) according to customer specifications.





# PRODUCT OVERVIEW

Product and process mapping mining

PROCESS STEP	APPLICATIONS	VALVES	GASKETS
Shaft / underground mining	Dewatering slurry	Butterfly valves KKD-81/82/83 Knife gate valves KSD Globe valves KAD Check valves KRD Plug valves KPD Diaphragm valves KMD Ball valves KHD Piston valves KVN	Spiral wound gaskets KLINGERSIL C-4430 KLINGERSIL C-4324 Rubber insertion
	Cooling water		
	Potable water		
	Firewater		
	Wastewater		
	Ventilation/ducting		
Surface / open-pit / open-cast mining	Dewatering slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Check valves KRD Diaphragm valves KMD	KLINGERSIL C-4324 Rubber insertion Rubber-steel gaskets
	Dewatering slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Check valves KRD Diaphragm valves KMD	KLINGERSIL C-4430 KLINGERSIL C-4324 Rubber insertion Rubber-steel gaskets
Alluvial / placer mining	Dewatering slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Check valves KRD Diaphragm valves KMD	KLINGERSIL C-4430 KLINGERSIL C-4324 Rubber insertion Rubber-steel gaskets
	Feedstock slurry		
In-situ / solution mining	Feedstock slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Check valves KRD Diaphragm valves KMD Plug valves KPD	Spiral wound gaskets KLINGERSIL C-8200 KLINGERSIL C-4324 TopChem 2000 TopChem 2003 TopChem 2005 Envelope gaskets Rubber-steel gaskets
	Chemicals handling		
Comminution	Feedstock slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG	KLINGERSIL C-4324 Rubber insertion Rubber-steel gaskets

GLAND PACKING	EXPANSION JOINTS	INSTRUMENTATION	PIPE PRODUCTS
K7302DL K25 K4313 K20 K54	Rubber bellows Stainless steel bellows Fabric compensators	Actuators KRP	Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps Buffalo saddles
K7302DL K25 K4313 K20 K54	Rubber bellows	Actuators KRP	Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps PolyGrip couplings Long barrel couplings
K7302DL K25 K4313 K20 K54	Rubber bellows	Actuators KRP	Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps PolyGrip couplings Long barrel couplings
K7302DL K25 K4313 K20 K54	Rubber bellows Stainless steel bellows	Actuators KRP	Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps PolyGrip couplings Long barrel couplings
K7302DL K25 K4313 K20 K54	Rubber bellows	Actuators KRP	Long barrel couplings PolyGrip couplings



# PRODUCT OVERVIEW

Product and process mapping mining

PROCESS STEP	APPLICATIONS	VALVES	GASKETS
Particle concentration / mineral extraction (gravity, froth / flotation, magnetic)	Feedstock slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Diaphragm valves KMD	KLINGERSIL C-4324 Rubber insertion Rubber-steel gaskets
Smelting	High temperature	Butterfly valves KKD-83 Knife gate valves KSD	Milam PSS
Leaching and digestion	Feedstock slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Globe valves KAD Plug valves KPD Diaphragm valves KMD	TopChem 2000 TopChem 2003 TopChem 2005 TopChem 2006 Envelope gaskets KLINGERSIL C-8200 Monel spiral wound gaskets
	Chemicals		
Thickening and filtration	Feedstock slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Diaphragm valves KMD Piston valves KVN	KLINGERSIL C-4324 Rubber insertion Rubber-steel gaskets
	Flocculents		
Liquation and distillation	High temperature	Butterfly valves KKD-83 Knife gate valves KSD	Milam PSS
Vapor phase, zone refining, chromatographic refining	Feedstock slurry	Butterfly valves KKD-82/83 Knife gate valves KSD-SKG Globe valves KAD Plug valves KPD Ball valves Ballostar KHI Ballostar KHA Ballostar KHE	Milam PSS TopChem 2000 TopChem 2003 TopChem 2005 TopChem 2006 Envelope gaskets KLINGERSIL C-8200 Monel spiral wound gaskets
	Chemicals		
	High temperature		

GLAND PACKING	EXPANSION JOINTS	INSTRUMENTATION	PIPE PRODUCTS
K7302DL K25 K4313 K20 K54	Rubber bellows	Actuators KRP	Long barrel couplings PolyGrip couplings Flange adaptors G-Flex repair coupling Ultra repair clamps
K54 K7301	Stainless steel bellows	Actuators KRP	
K54		Actuators KRP	
K7302DL K25 K4313 K20 K54	Rubber bellows	Actuators KRP	Long barrel couplings PolyGrip couplings Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps
K7301		Actuators KRP	
K7301		Actuators KRP	



# PRODUCT OVERVIEW

Product and process mapping mining

PROCESS STEP	APPLICATIONS	VALVES	GASKETS
Electrolytic refining	Non-aggressive chemicals	Ball valves Ballostar KHI Ballostar KHA Ballostar KHE KHD Plug valves KPD Piston valves KVN	EPDM KLINGERSIL C-4324 KLINGERSIL C-4243 Rubber-steel gaskets
	Dewatering slurry	Butterfly valves KKD-81/82/83 Knife gate valves KSD-SKG Diaphragm valves KMD Check valves KRD	KLINGERSIL C-4324 KLINGERSIL C-4243 Rubber insertion Rubber-steel gaskets
Tailings management	Tailings		

GLAND PACKING	EXPANSION JOINTS	INSTRUMENTATION	PIPE PRODUCTS
K54	Rubber bellows	Actuators KRP	Long barrel couplings PolyGrip couplings Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps Buffalo saddles
K7302DL K25 K4313 K20 K54	Rubber bellows	Actuators KRP	Long barrel couplings PolyGrip couplings Dismantling joints Flange adaptors G-Flex repair coupling Ultra repair clamps Buffalo saddles





# KLINGER GROUP

Visionary by Tradition







---

KLINGER Holding GmbH  
Am Kanal 8-10  
2352 Gumpoldskirchen, Austria  
Tel: +43 2252 607 186-0  
[office@klinger-international.com](mailto:office@klinger-international.com)